



## R4GBJ15005 thru R4GBJ1510

### 15.0A, Fast Recovery Glass Passivated Bridge Rectifier Rectifier Reverse Voltage 50 to 1000V

#### Features


- Ideal for printed circuit board mounting
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Built-in printed circuit board stand-offs
- High case dielectric strength
- High temperature soldering guaranteed 260°C/5 seconds at 5 lbs (2.3kg) tension

#### Mechanical Data

Case: Reliable low cost construction utilizing molded plastic technique

Terminals: Plated leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

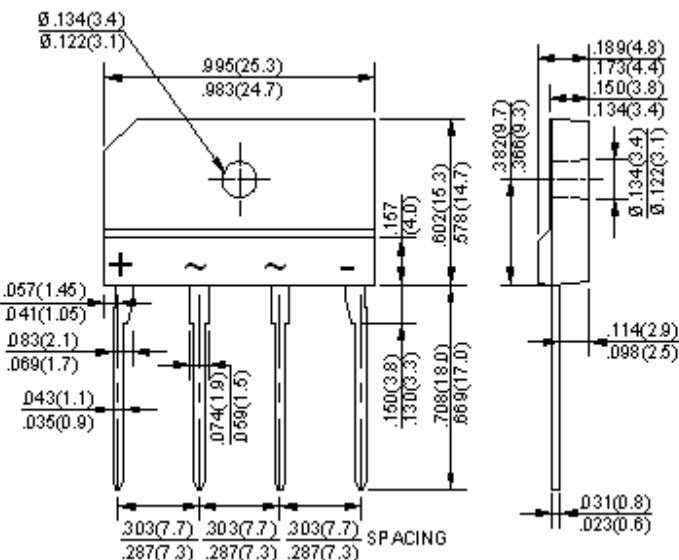

Dimensions in inches and (millimeters)

#### Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
For Capacitive load derate current by 20%.

Parameter	Symbol	R4GBJ 15005	R4GBJ 1501	R4GBJ 1502	R4GBJ 1504	R4GBJ 1506	R4GBJ 1508	R4GBJ 1510	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TC=100°C (with heatsink)	IF(AV)				15.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				220				A
Rating for fusing ( t<8.3ms)	I <sup>2</sup> t				200				A <sup>2</sup> sec
Maximum reverse recovery time (Note 2)	t <sub>rr</sub>			150		250	500		ns
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>TSG</sub>			-55 to + 150					°C

#### Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
For Capacitive load derate by 20 %.


Parameter	Symbol	R4GBJ 15005	R4GBJ 1501	R4GBJ 1502	R4GBJ 1504	R4GBJ 1506	R4GBJ 1508	R4GBJ 1510	Unit
Maximum instantaneous forward voltage drop per leg at 7.5A	VF				1.3				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				10	500			μA

Notes: (1)Thermal resistance from Junction to Ambert on P.C.board mounting.


(2)Reverse recovery time test conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A

**Rating and Characteristic Curves** (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )  
**R4GBJ15005 thru R4GBJ1510**


**Fig. 1 Derating Curve for Output Rectified Current**

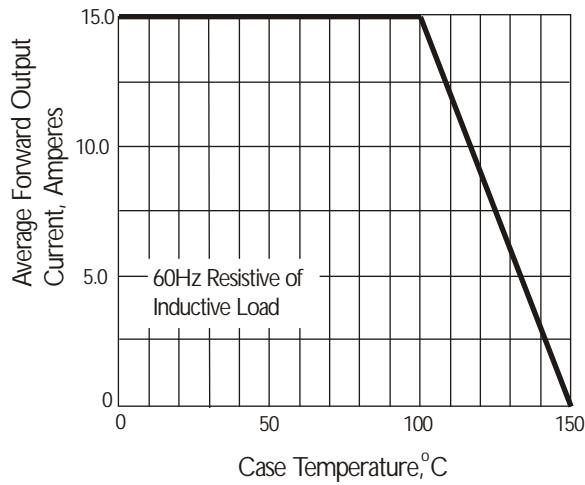


**Fig. 2 Maximum Non-repetitive Peak Forward Surge Current**

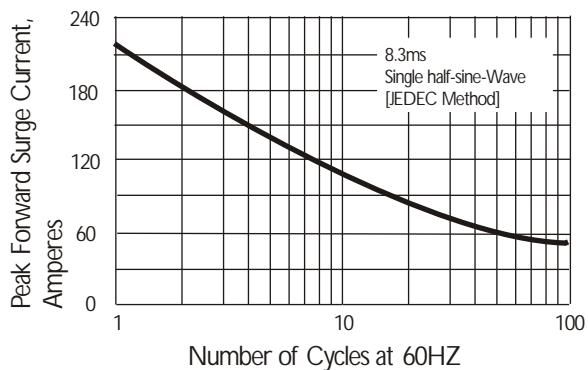

**Fig. 3 Typical Instantaneous Forward Characteristics**

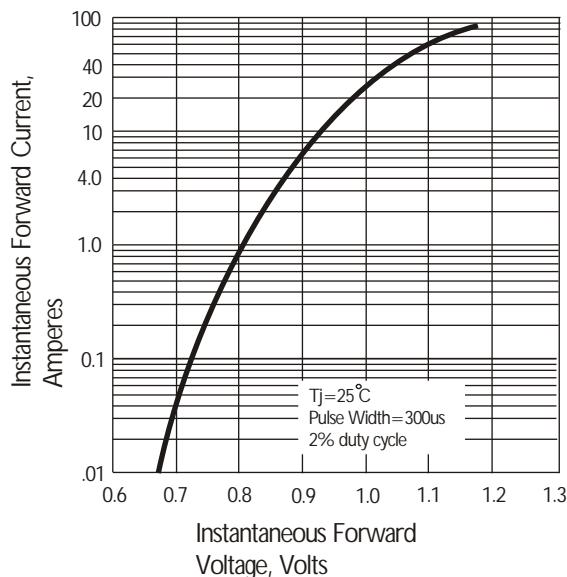

**Fig. 4 Typical Reverse Characteristics**

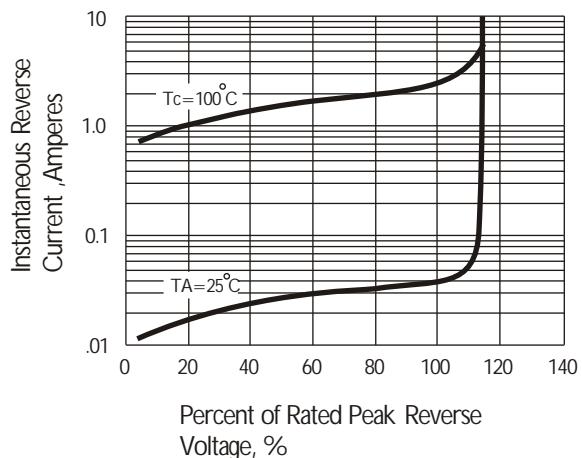

**Fig. 5 Typical Junction Capacitance**

