



RGBJ25005 thru RGBJ2510

25.0A, Fast Recovery Glass Passivated Bridge Rectifier

Rectifier Reverse Voltage 50 to 1000V

Features


- Ideal for printed circuit board mounting
- This series is UL listed under the Recognized Component Index, file number E484648
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Built-in printed circuit board stand-offs
- High case dielectric strength
- High temperature soldering guaranteed 260°C /5 seconds at 5 lbs (2.3kg) tension

Mechanical Data

Case: Reliable low cost construction utilizing molded plastic technique

Terminals: Plated leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

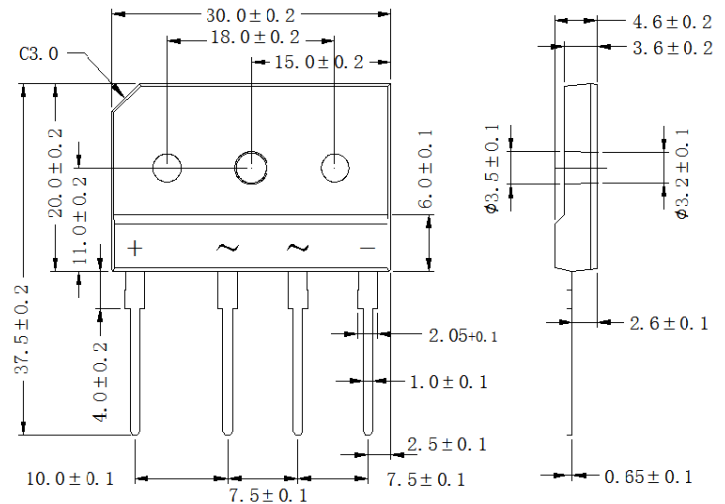

Dimensions in inches and (millimeters)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

CHARACTERISTICS	SYMBOL	RGBJ 25005	RGBJ 2501	RGBJ 2502	RGBJ 2504	RGBJ 2506	RGBJ 2508	RGBJ 2510	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	30	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2) Rectified Current @ T _c =100℃ (without heatsink)	I _(AV)	25.0 3.5							A
Peak Forward Surage Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	350							A
Maximum reverse recovery time (Note 3)	t _{rr}	150				250	500		ns
Maximum Forward Voltage at 12.5A DC	V _F	1.3							V
Maximum DC Reverse Current @ T _J =25℃ at Rated DC Blocking Voltage @ T _J =125℃	I _R	10 500							uA
Typical Thermal Resistance (Note2)	R _{θJC}	1.0							℃/W
Operating Temperature Range	T _J	-55 to +150							℃
Storage Temperature Range	T _{STG}	-55 to +150							℃

NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2.Device mounted on 300mm*300mm*1.6mm cu plate heatsink.
3.Reverse recovery time test conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Rating and Characteristic Curves ($T_A = 25^{\circ}\text{C}$ Unless otherwise noted)

RGBJ25005 thru RGBJ2510

FIG.1-FORWARD CURRENT DERATING CURVE

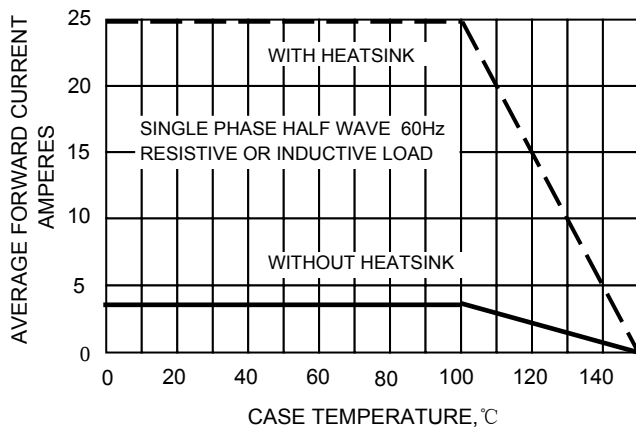


FIG.2-MAXMUN NON-REPETITIVE SURGE CURRENT

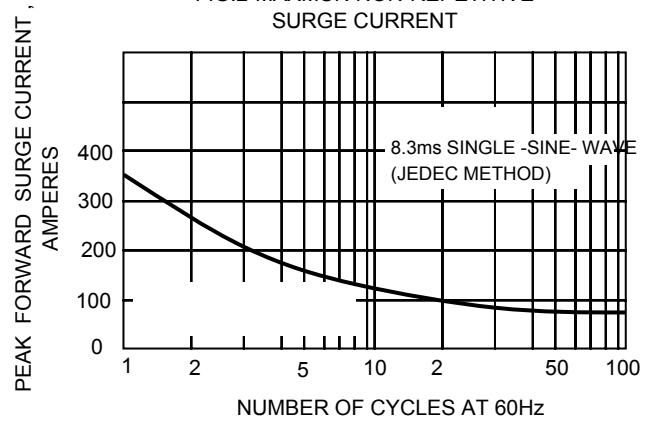


FIG.3-TYPICAL JUNCTION CAPACITANCE

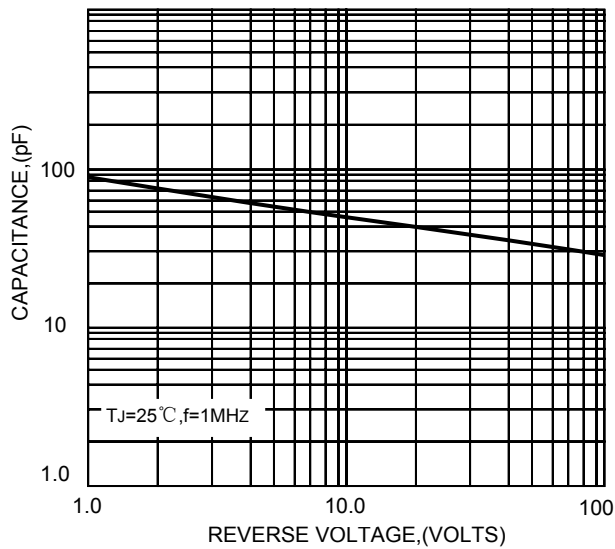


FIG.4-TYPICAL FORWARD CHARACTERISTICS

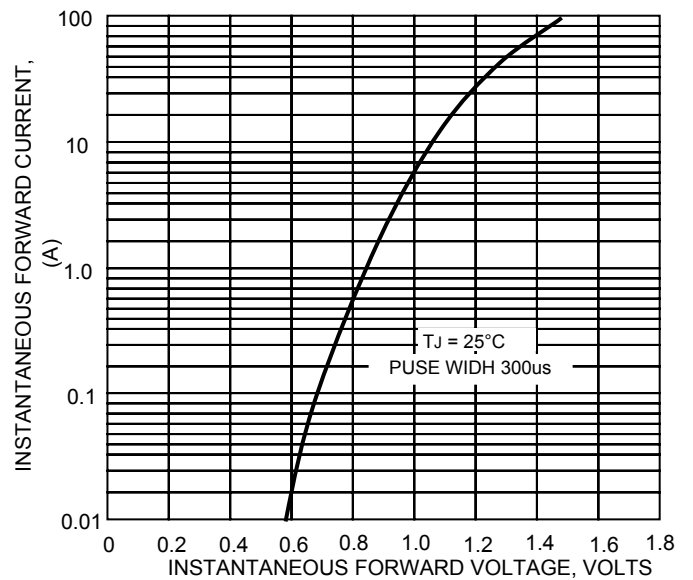


FIG.5-TYPICAL REVERSE

